

Inline Detonation Flame Arrester

EC design test certificate no.

Standard gap (MESG)

Explosion group

Operating direction

Flange connection

Thread connection

Weight

: 1002-0025-70

: IBExU 21 ATEX 2109 X

: < 0,50 mm



: Ex G IIC

: Bidirektional / Bi-directional

: EN1092-1 (DIN2576) Typ01 PN10/40

: n.a.

: ~ 16,3 kg

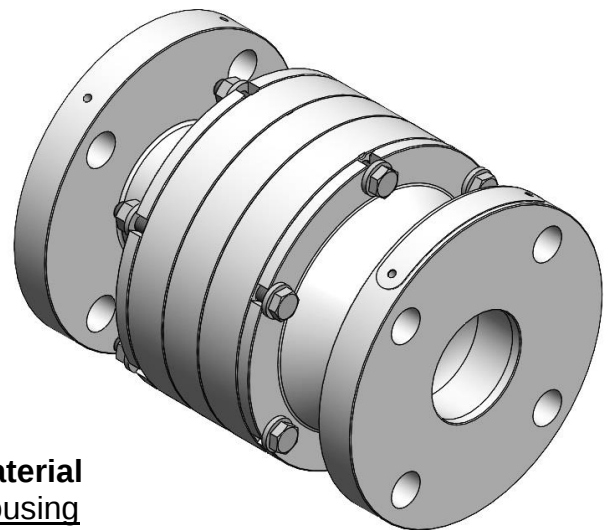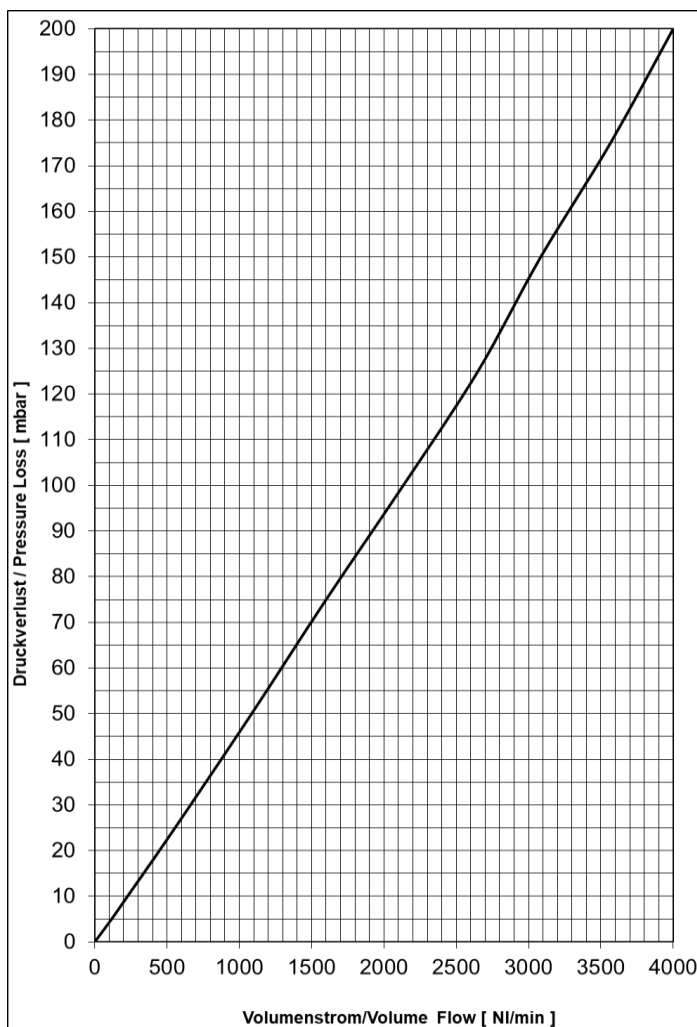

Material

Housing

V4A/AISI 316 range

Flame Arrester Element

V4A/AISI 316 range

O-Ring

PTFE

Operating Data

Type : DET 4

Absolute pressure : $\leq 1,2$ bar

Temperature : $\leq 60,0$ °C

Nominal pipe size : $\leq$ DN50

Pressure loss

Medium Air

$p_0 = 1013$ mbar, $T_0 = 273$ K, density = 1,293 kg/m³