
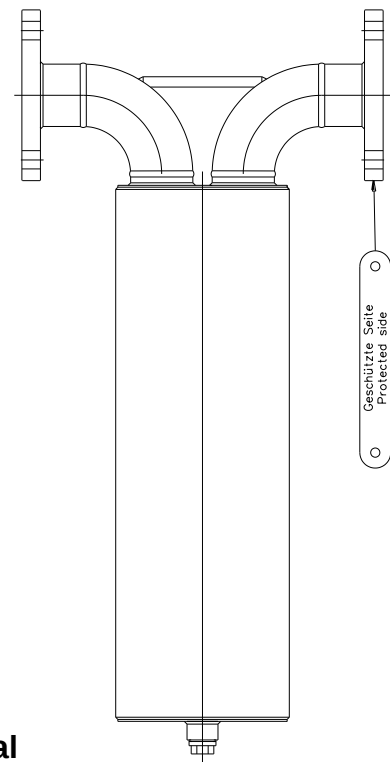


Inline Liquid Product Detonation Flame Arrest	: 1015-0003-70
EC design test certificate no.	: IBExU 19 ATEX 2065 X
Standard gap (MESG)	: $\geq 0,65$ mm
Explosion group	: Ex G IIB3
Operating direction	: Einseitig / One direction
Flange connection	: EN1092-1 Typ 01 (DIN2576) PN10/16
Weight	: $\sim 46,0$ kg

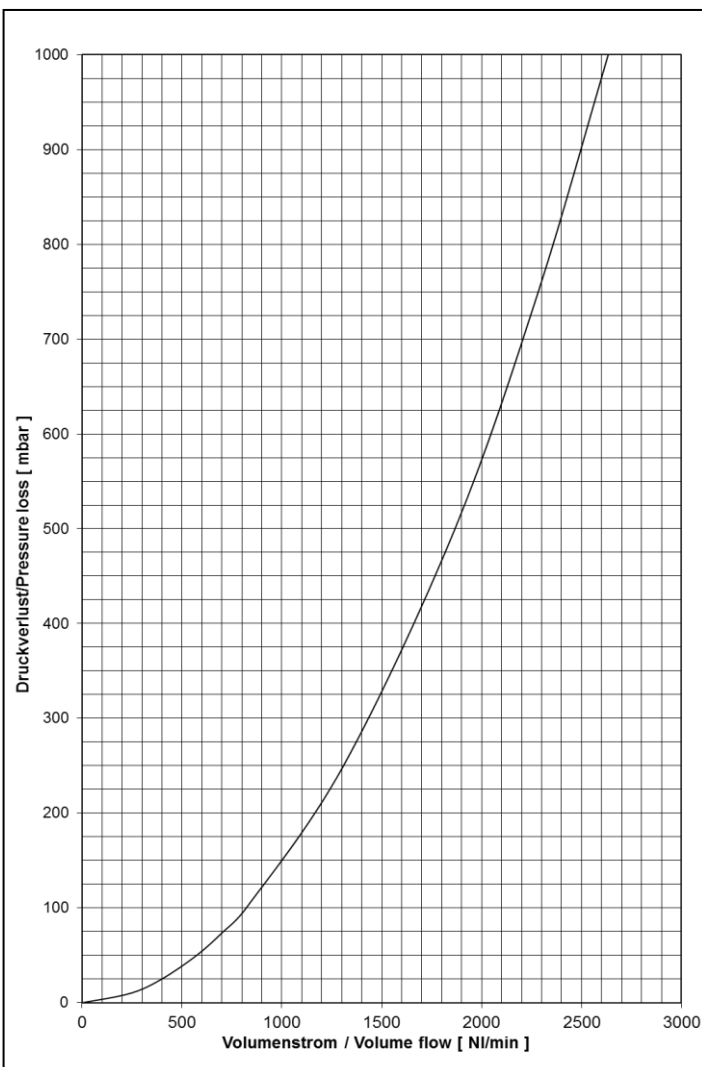

Material
Housing
V4A / AISI 316 range

Operating Data
Type : DET4
Absolute pressure : $\leq 1,1$ bar
Temperature : $\leq 60,0$ °C
Nominal pipe size : $\leq$ DN80

Pressure loss
Medium Water
 $t = 15$ °C, density = 1000 kg/m^3