
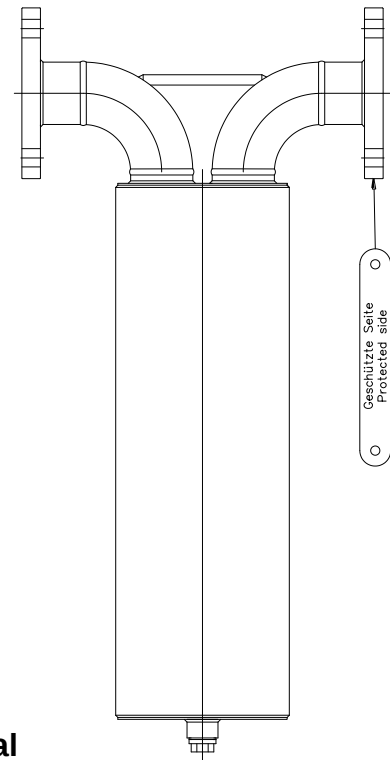


Inline Liquid Product Detonation Flame Arrest	: 1015-0004-40
EC design test certificate no.	: IBExU 16 ATEX 2118 X
Standard gap (MESG)	: $\geq 0,65$ mm
Explosion group	: Ex G IIB3
Operating direction	: Einseitig / One direction
Flange connection	: EN1092-1 Typ 01 (DIN2576) PN10/16
Weight	: ~ 19,0 kg

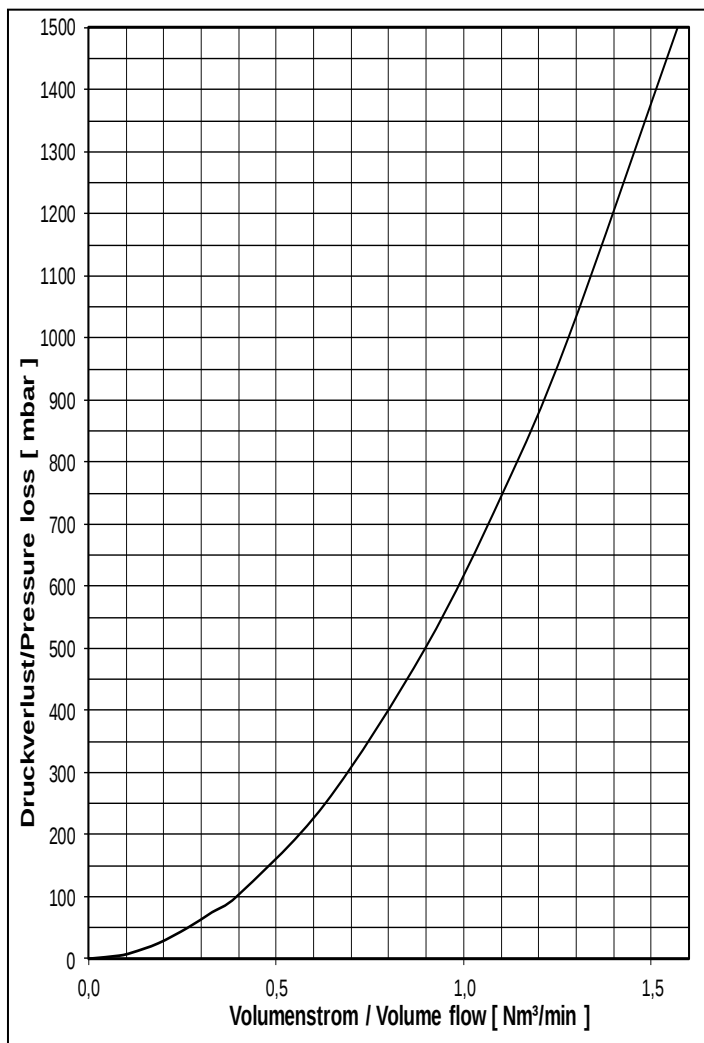

Material
Housing
 V4A / AISI 316 range

Operating Data
 Type : DET 4
 Absolute pressure : $\leq 1,1$ bar
 Temperature : $\leq 60,0$ °C
 Nominal pipe size : $\leq$ DN40

Pressure loss
 Medium Water
 t = 15 °C, density = 1000 kg/m³