
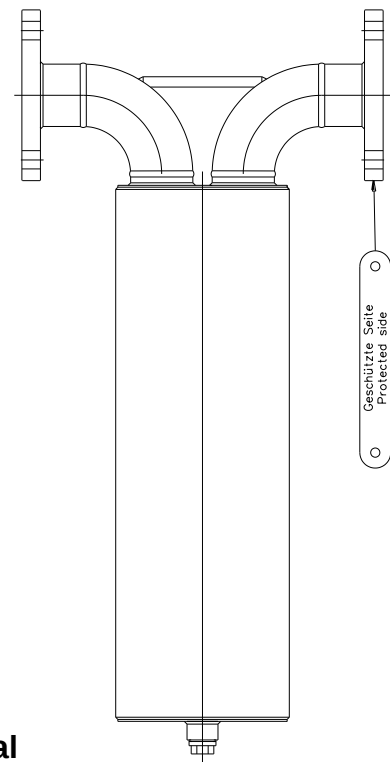


Inline Liquid Product Detonation Flame Arrest	: 1015-0005-70
EC design test certificate no.	: IBExU 19 ATEX 2065 X
Standard gap (MESG)	: $\geq 0,65$ mm
Explosion group	: Ex G IIB3
Operating direction	: Einseitig / One direction
Flange connection	: EN1092-1 Typ 01 (DIN2576) PN10/40
Weight	: $\sim 9,0$ kg

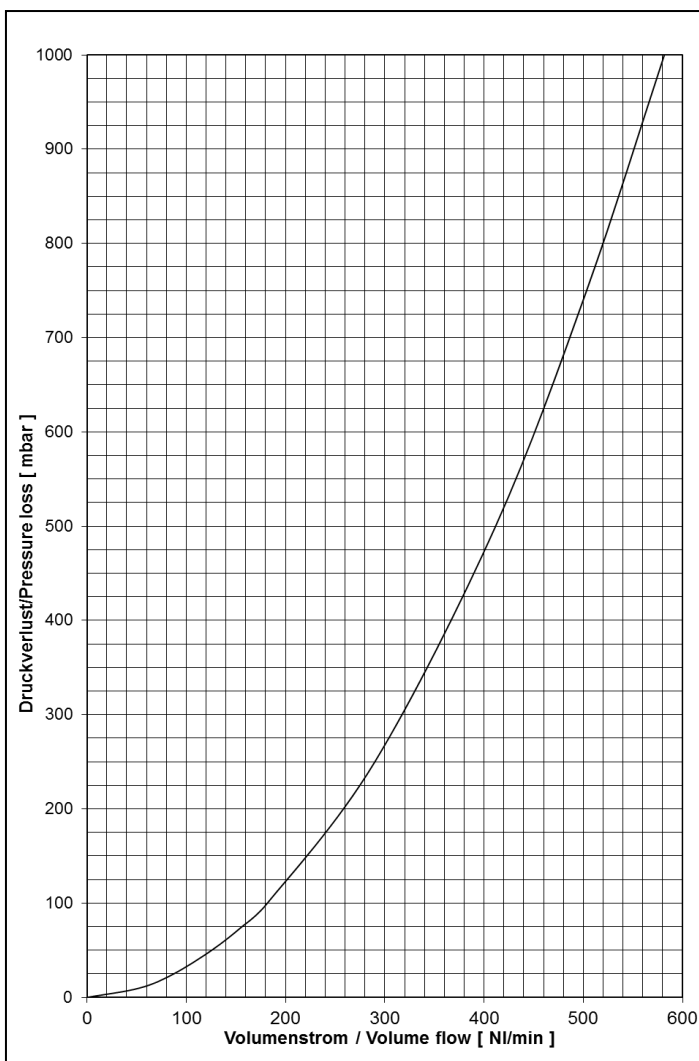

Material
Housing
V4A / AISI 316 range

Operating Data
Type : DET 4
Absolute pressure : $\leq 1,1$ bar
Temperature : $\leq 60,0$ °C
Nominal pipe size : $\leq$ DN32

Pressure loss
Medium Water
t = 15 °C, density = 1000 kg/m³